

TDOMDIS2202

2MP IR MINI DOME NETWORK CAMERA



FEATURES:

- 1/2.8" 2Megapixel progressive scan STARVISTM CMOS
- H.265&H.264 triple-stream encoding
- 50/60fps@2M(1920×1080)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC,
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.8mm fixed lens (3.6mm, 6mm optional)
- Max. IR LEDs Length 20m
- Micro SD memory, IP67, IK10, PoE

Specifications:

Model		TDOMDIS2202			
Camera					
Image Sensor		1/2.8" 2Megapixel progressive scan CMOS			
Effective Pixels		1920(H)×1080(V)			
RAM/ROM		256MB/32MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000s			
Minimum Illumination		0.009Lux/F2.0(Color,1/3s,30IRE) 0.07Lux/2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)			
S/N Ratio		More than 50dB			
IR Distance		Up to 20m (66 ft)			
IR On/Off Control		Auto/Manual			
IR LEDs		10			
Lens					
Lens Type		Fixed			
Mount Type		Board-in			
Focal Length		2.8mm (3.6mm, 6mm optional)			
Max Aperture		F2.0 (F2.0, F2.0)			
Angle of View		H: 110° (87°, 51°), V:58° (48°, 30°)			
Optical Zoom		N/A			
Focus Control		Fixed			
Close Focus Distance		N/A			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8mm	44m (144ft)	17m (56ft)	9m (30ft)	4m (13ft)
	3.6mm	55m (180ft)	22m (72ft)	11m (36ft)	6m (20ft)
	6.0mm	81m (266ft)	32m (105ft)	16m (52ft)	8m (26ft)

Pan / Tilt / Rotation	
Interface	Pan:0°~60°; Tilt:0°~80°; Rotation:0°~360°
Intelligence	
IVS	Tripwire, Intrusion, Object Abandoned/Missing
Advanced Intelligent Range	Face Detection
Video	
Compression	H.265+/H.265/H.264+/H.264
Streaming Capability	3 Streams
Resolution	1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA(640x480)/CIF(352x288/352x240)
Frame Rate	Main Stream: 1080P (1~50/60fps)
	Sub Stream: D1(1~50/60fps)
	Third Stream: 1080P(1~25/30fps)
Bit Rate Control	CBR/VBR
Bit Rate	H.264: 24~9472Kbps H.265: 14~5632Kbps
Day/Night	Auto (ICR) / Color / B/W
BLC Mode	BLC / HLC / WDR(120dB)
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control	Auto/Manual
Noise Reduction	3D DNR
Motion Detection	Off / On (4 Zone, Rectangle)
Region of Interest	Off / On (4 Zone)
Electronic Image Stabilization (EIS)	N/A
Smart IR	Support
Defog	N/A
Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On

Privacy Masking	Off / On (4 Area, Rectangle)
Audio	
Compression	G.711a/ G.711Mu/ AAC/ G.726
Network	
Ethernet	RJ-45 (10/100Base-T)/M12 D-Coding
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	10 Users / 20 Users
Edge Storage	NAS Local PC for instant recording Mirco SD card 128GB
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	Smart PSS, DSS, Easy4ip
Smart Phone	IOS, Android
Certifications	
Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B E-mark(ECE-Regulation No.10) EN50155
Interface	
Video Interface	N/A
Audio Interface	Built-in Mic
RS485	N/A
Alarm	N/A
Environmental	
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Construction	

Casing	Metal
Dimensions	Φ106mm×50.3mm (4.17"×1.98")
Net Weight	0.4kg (0.88lb)
Gross Weight	0.44kg (0.97lb)

Accessories:

Optional:




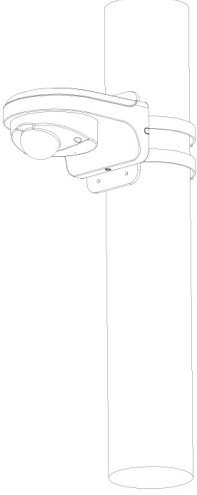

PFA139
Junction Box



PFB204W
Wall Mount



PFA152
Pole Mount

Junction box	Pole Mount
PFA139	PFB204W + PFA152
	
Wall Mount	
PFB204W	
	

Dimensions:

